


E2 Features

- Kit version for mounting on a motor or other shaft
- Supports 14 shaft sizes (2 to 10 mm and 1/8 to 3/8 in.)
- For NEMA 17 to NEMA 34 and larger motors
- 26 Resolutions from 32-5,000 CPR (128-20,000 PPR)
- 2 channel quadrature TTL square wave output
- Optional Index channel
- Choice of 5 base styles and 3 cover options
- Mounting compatibility with HEDS-5500
- High retention connector/cable (sold separately)

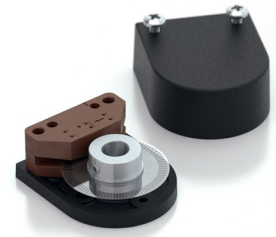

US Digital E2 Motor Encoder Description

The US Digital E2 motor encoder mounts directly to a motor or other rotating shaft. This optical encoder features a rugged, glass-filled polymer housing and is designed for easy installation and removal.



The E2 rotary encoder contains a precision machined aluminum hub with a specially patterned Mylar disk. This disk, in combination with our proprietary optical encoder module, creates a system that is highly tolerant to mechanical misalignment.

The E2 is available with five base configurations and three cover styles, which allow it to fit a wide range of applications. The output for this optical rotary encoder is single-ended. If your application requires a differential output (due to needing a cable over 10 feet or is located in an electrically noisy environment) you can either add a PC4 (<https://www.usdigital.com/pc4/>) / PC5 (<https://www.usdigital.com/pc5/>) differential line driver or check out our E5 (<https://www.usdigital.com/products/encoders/incremental/kit/e5/>), which includes an optional differential output. This incremental encoder is designed for use with a high-retention connector. After making each selection in the Product Configurator, compatible cables and connectors will be displayed below and must be purchased separately.





BROADCOM/AVAGO REPLACEMENTS:

US Digital's E2 encoder may be used as direct replacements (<https://www.usdigital.com/support/resources/reference/compatibility-guides/us-digital-e2-compatibility-guide-for-broadcomavagoagilentp-heds-5xxx-encoder/>) for Avago HEDM-5500, HEDM-5600, (<https://www.usdigital.com/support/resources/reference/compatibility-guides/e2-cross-reference-guide-hedm-5x0x/>) HEDS-5500, HEDS-5600 (<https://www.usdigital.com/support/resources/reference/compatibility-guides/us-digital-e2-compatibility-guide-for-broadcomavagoagilentp-heds-5xxx-encoder/>)

Mechanical Drawings

E2 Motor Encoder (Default)

RELEASE DATE: 1/19/2026

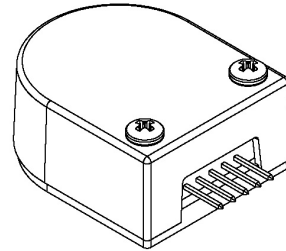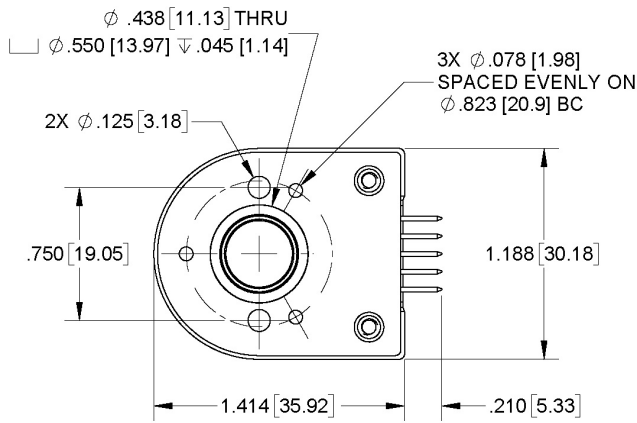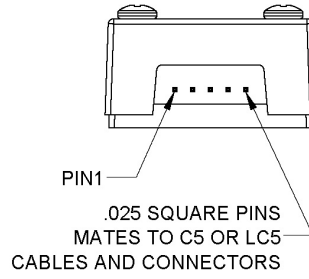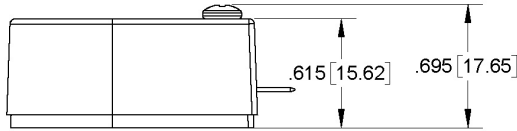

US DIGITAL 1400 NE 136th Avenue
Vancouver, Washington 98684, USA


info@usdigital.com
www.usdigital.com

Local: 360.260.2468
Toll-free: 800.736.0194


UNITS: INCHES [MM]
METRIC SHOWN FOR REFERENCE ONLY

E2 Motor Encoder (Base & Cover Options)

E-OPTION COVER
(EXTENSION FOR SHAFT
LENGTHS UP TO .805 [20.45])

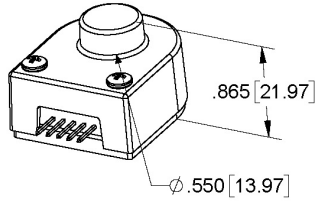


H-OPTION COVER
(COVER HOLE FOR SHAFT
LENGTHS OVER .805 [20.45])

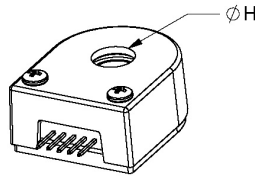


H = .375 [9.53] FOR BORE SIZES $\leq \phi .315$ [8]
H = .500 [12.7] FOR BORE SIZES $> \phi .315$ [8]


3-OPTION BASE
(LARGER MOUNTING HOLES)

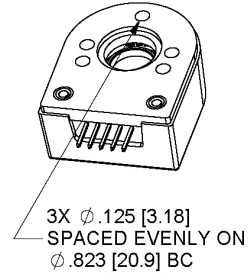


A-OPTION BASE
(ALIGNMENT BOSS)

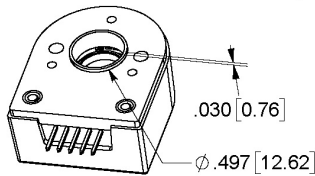

G-OPTION BASE
(1.812 MOUNTING)

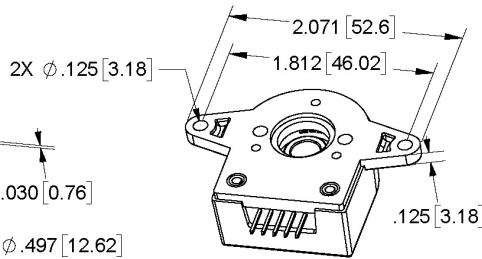

R-OPTION BASE
(ROTATIONAL MOUNTING)

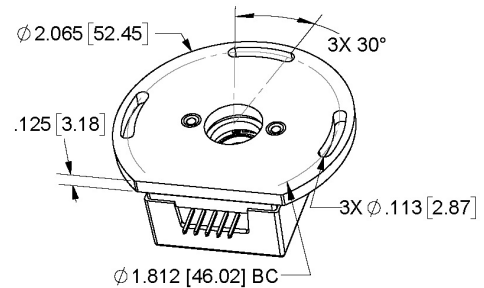

REQUIRES MINIMUM .570 [14.48] SHAFT LENGTH

RELEASE DATE: 1/19/2026

US DIGITAL 1400 NE 136th Avenue
Vancouver, Washington 98684, USA

info@usdigital.com
www.usdigital.com

Local: 360.260.2468
Toll-free: 800.736.0194

UNITS: INCHES [MM]
METRIC SHOWN FOR REFERENCE ONLY

Specifications

ENVIRONMENTAL

PARAMETER	VALUE	UNITS
Operating Temperature, CPR < 2000	-40 to 100	C
Operating Temperature, CPR \geq 2000	-25 to 100	C
Electrostatic Discharge, IEC 61000-4-2	± 4	kV
Vibration (10Hz to 2kHz, sinusoidal)	20	G
Shock (6 milliseconds, half-sine)	75	G

MECHANICAL

PARAMETER	VALUE	UNITS
Max. Shaft Axial Play	±0.010	in.
Max. Shaft Runout	0.004 T.I.R.	in.
Max. Acceleration	250000	rad/sec ²
For CPR ≤ 1250: Max. RPM (1) Max. A/B Frequency e.x. CPR=1250, Max. RPM=14400 e.x. CPR=100, Max. RPM=60000	minimum value of ((18 x 10 ⁶) / CPR) and (60000) 300	RPM kHz
For CPR = 2000, 2048, 2500: Max. RPM (1) Max. A/B Frequency	minimum value of ((21.6 x 10 ⁶) / CPR) and (60000) 360	RPM kHz
For CPR = 4000, 4096, 5000: Max. RPM (1) Max. A/B Frequency	minimum value of ((43.2 x 10 ⁶) / CPR) and (60000) 720	RPM kHz
Typical Product Weight	0.56	oz.
Codewheel Moment of Inertia	8.0 x 10 ⁻⁶	oz-in-s ²
Hub Set Screw	#4-48	
Hex Wrench Size	0.050	in.
Encoder Base plate Thickness	0.135	in.
3 Mounting Screw Size	#0-80	
2 Mounting Screw Size	#2-56 or #4-40	
3 Screw Bolt Circle Diameter	0.823 ± 0.005	in.
2 Screw Bolt Circle Diameter	0.750 ± 0.005	in.
Required Shaft Length (2)(3) With E-option (3) With H-option	0.445 to 0.575 0.445 to 0.805 > 0.445	in. in. in.
Index Alignment to Hub Set Screw	180 Typical	degrees
Technical Bulletin TB1001 - Shaft and Bore Tolerances		Download (https://www.usdigital.com/media/yyvb4qsy/tb_1001.pdf)

(1) 60000 RPM is the maximum rpm due to mechanical considerations. The maximum rpm due to the module's maximum frequency response is dependent upon the module's resolution (CPR).

(2) Add 0.125" to the required shaft length when using R-option.

(3) Including Axial play.

TORQUE SPECIFICATIONS

PARAMETER	VALUE	TORQUE
Hub Set Screw	2-3	in-lbs
Cover Screw	2-4	in-lbs
Base Mounting Screw (#0-80)	1-2	in-lbs
Base Mounting Screw (#2-56)	2-3	in-lbs
Base Mounting Screw (#4-40)	4-6	in-lbs
Adapter Plate Mounting Surface (#2-56 screws)	2-3	in-lbs
Adapter Plate Mounting Surface (#4-40 screws)	4-6	in-lbs

PHASE RELATIONSHIP

B leads A for clockwise shaft rotation, and A leads B for counterclockwise rotation viewed from the cover side of the encoder.

ELECTRICAL

- Specifications apply over the entire operating temperature range.
- Typical values are specified at $V_{cc} = 5.0V_{dc}$ and $25^{\circ}C$.
- For complete details, see the EM1 (<https://www.usdigital.com/products/encoders/incremental/components/modules/em1/>) or EM2 (<https://www.usdigital.com/products/encoders/incremental/components/modules/em2/>) product pages.

PARAMETER	MIN.	TYP.	MAX.	UNITS	CONDITIONS
Supply Voltage	4.5	5.0	5.5	V	
Supply Current		27 54 72	33 62 85	mA mA mA	CPR < 500, no load CPR ≥ 500 and < 2000, no load CPR ≥ 2000, no load
Low-level Output		0.25	0.5 0.5	V V V	IOL = 8mA max., CPR < 2000 IOL = 5mA max., CPR ≥ 2000 no load, CPR ≥ 2000
High-level Output	2.0 2.0	4.8 3.5		V V V V	IOH = -8mA max. and CPR < 2000 IOH = -5mA max. and CPR ≥ 2000 no load and CPR < 2000 no load and CPR ≥ 2000
Output Current Per Channel	-8 -5		8 5	mA mA	CPR < 2000 CPR ≥ 2000
Output Rise Time		110 50		nS nS	CPR < 2000 CPR ≥ 2000, ± 5mA load
Output Fall Time		100 50		nS nS	CPR < 2000 CPR ≥ 2000, ± 5mA load

PIN-OUT

PIN	DESCRIPTION
1	Ground
2	Index
3	A channel
4	+5VDC power
5	B channel

Note: 5-pin single-ended mating connector is CON-C5 (<https://www.usdigital.com/products/accessories/connectors/con-c5/>) or CON-LC5 (<https://www.usdigital.com/products/accessories/connectors/con-lc5/>)

ACCESSORIES

1. Centering Tool

Part #: CTOOL - (Shaft Diameter)

This reusable tool centers the shaft within the encoder base during assembly. It must be used for the proper functioning of the encoder.

2. Hex Tool

Part #: HEXD-050

Hex driver, 0.050" flat-to-flat for #3-48 or #4-48 set screws. Included with **-B** or **-1** packaging options for order quantities of 10 or more.

Part #: HEXW-050

Hex wrench, 0.050" flat-to-flat for #3-48 or #4-48 set screws. Included with **-B** or **-1** packaging options for order quantities of 9 or less. Included with **-3** packaging option for all order quantities.

3. Spacer Tool

Part #: SPACER-E2

This reusable tool sets the correct spacing between the disk and sensor during assembly. It must be used for the proper functioning of the encoder.

4. Screws

Part #: SCREW-080-250-PH

Description: Pan Head, Philips #0-80 UNF x 1/4"

Use: Base Mounting

Quantity Required: 3

Screws are not included

Part #: SCREW-256-250-PH

Description: Pan Head, Philips #2-56 UNC x 1/4"

Use: Base Mounting

Quantity Required: 2

Screws are not included

Part #: SCREW-440-250-PH

Description: Pan Head, Philips #4-40 UNC x 1/4"

Use: Base Mounting

Quantity Required: 2

Screws are not included

Part #: SCREW-440-625-PH

Description: Pan Head, Phillips 4-40 UNC x 5/8"

Use: Cover Mounting

Quantity Required: 2

Screws are included

Part #: SCREW-448-063-SS

Description: Socket Head Set Screw, 4-48 UNC x 1/16"

Use: Hub/Disk Mounting for 5/16" - 10mm Bore

Quantity Required: 1

Screw is included

Part #: SCREW-448-125-SS


Description: Socket Head Set Screw, 4-48 UNC x 1/8"

Use: Hub/Disk Mounting for 2mm - 1/4" Bore

Quantity Required: 1

Screw is included

OUTPUT WAVEFORMS

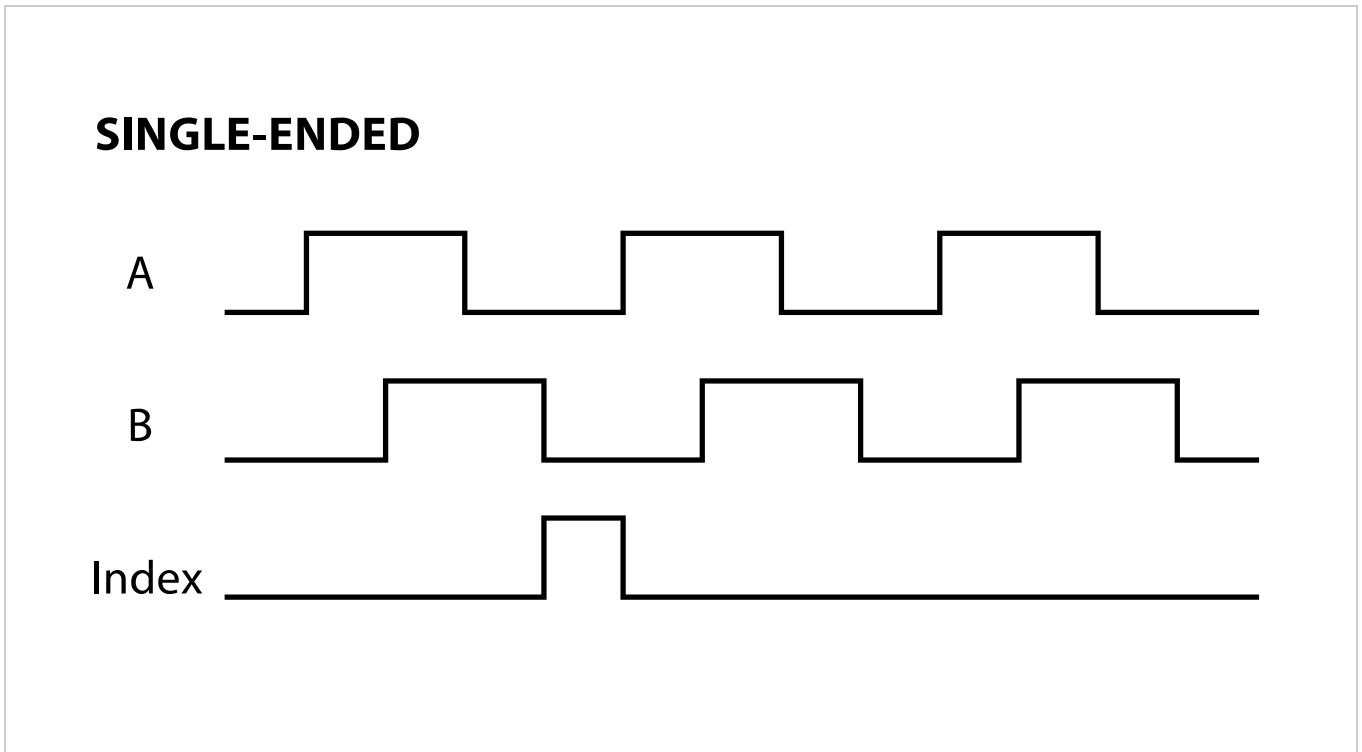

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.
- Cables and connectors are not included and must be ordered separately.

Configuration Options

E2	CPR (Cycles Per Revolution)	Bore Size	Index	Cover	Base	Packaging
		079 (2.0mm)	IE (Index)	D (Default)	D (Default)	Bulk (B) - Includes one centering, hex and spacer tool per order, plus an extra set per 100 encoders.
		118 (3.0mm)	NE (Non-Index)	E (Extended)	3 (1/8" Mounting Holes)	Individual (1) - Includes one centering, hex, and spacer tool per order, plus an extra set per 100 encoders.
	32	125 (1/8")		H (Through-Hole)	A (Aligning Shoulder)	Individual (3) - Includes one centering, hex, and spacer tool with each encoder.
	50	156 (5/32")			G (1.812" Diameter Bolt Circle)	
	96	157 (4.0mm)			R (1.812" Diameter Bolt Circle, 3 Slot Rotational Mounting)	
	100	188 (3/16")				
	120	197 (5.0mm)				
	192	236 (6.0mm)				
	200	250 (1/4")				
	250	276 (7.0mm)				
	256	313 (5/16")				
	360	315 (8.0mm)				
	400	375 (3/8")				
	500	394 (10.0mm)				
	512					
	540					
	720					
	800					
	900					
	1000					
	1024					
	1250					
	2000					
	2048					
	2500					
	4000					
	4096					
	5000					

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the E2 product page (<https://www.usdigital.com/products/E2>) for pricing and additional information.