L2 Features

- Kit version for mounting on a motor or other shaft
- Low profile, only 0.398 in. tall
- Supports 14 shaft sizes (2 to 8 mm and 1/8 to 5/16 in.)
- For NEMA 17 to NEMA 34 and larger motors
- Resolutions from 32-1,250 CPR (128-5,000 PPR)
- 2 channel quadrature TTL square wave output
- Optional Index channel
- High retention connector/cable (sold separately)

US Digital L2 Motor Encoder Description

The US Digital L2 motor encoder is a low-profile rotary encoder with a height of 0.398" that mounts directly to a motor or other rotating shaft. This optical encoder features a rugged, glass-filled polymer housing and is designed for easy installation into space-limited applications. The L2 has a standard 0.75 in. bolt spacing mount.




The L2 optical rotary encoder contains a precision machined aluminum hub with a specially patterned Mylar disk. This disk, in combination with our proprietary optical encoder module, creates a system that is highly tolerant to mechanical misalignment.

The L2 incremental encoder has a single-ended output and is designed for use with a high-retention connector/cable, which are sold separately.

Mechanical Drawings



■ | L2 Motor Encoder

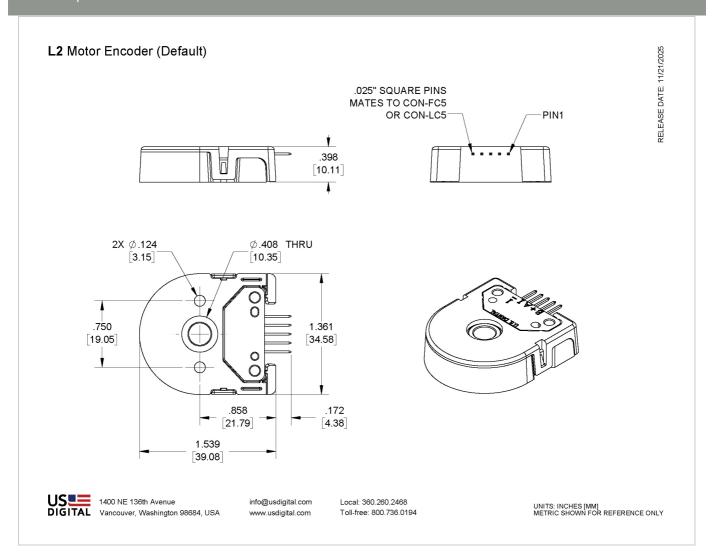

Specifications

ENVIRONMENTAL

PARAMETER	VALUE	UNITS
Operating Temperature, CPR < 2000	-40 to 100	С
Operating Temperature, CPR ≥ 2000	-25 to 100	С
Electrostatic Discharge, IEC 61000-4-2	± 4	kV
Vibration (10Hz to 2kHz, sinusoidal)	20	G
Shock (6 milliseconds, half-sine)	75	G



MECHANICAL

PARAMETER	VALUE	UNITS
Max. Shaft Axial Play	±0.010	in.
Max. Shaft Runout	0.004 T.I.R.	in.
Max. Acceleration	250000	rad/sec ²
For CPR ≤ 1250: Max. RPM (1) Max. A/B Frequency e.x. CPR=1250, Max. RPM=14400 e.x. CPR=100, Max. RPM=60000	minimum value of ((18 x 10^6) / CPR) and (60000) 300	RPM kHz
Typical Product Weight	0.53	OZ.
Codewheel Moment of Inertia	8.0 x 10^-6	oz-in-s²
Hub Set Screw	#4-48	
Hex Wrench Size	0.050	in.
Mounting Screw Size	#2-56 or #4-40	
Required Shaft Length (2)(3)	0.445 to 0.575	in.
Index Alignment to Hub Set Screw	180 Typical	degrees
Technical Bulletin TB1001 - Sha	aft and Bore Tolerances	Download (https://www.usdigital.com/media/yyvb4qsy/tb_1001.pdf)

- (1) 60000 RPM is the maximum rpm due to mechanical considerations. The maximum rpm due to the module's maximum frequency response is dependent upon the module's resolution (CPR).
- (2) Add 0.125" to the required shaft length when using R-option.
- (3) Including Axial play.

TORQUE SPECIFICATIONS

PARAMETER	VALUE	TORQUE
Hub Set Screw	2-3	in-lbs
Base Mounting Screw (#4-40)	4-6	in-lbs

PHASE RELATIONSHIP

A leads B for clockwise shaft rotation, and B leads A for counterclockwise rotation viewed from the cover side of the encoder.



ELECTRICAL

- Specifications apply over the entire operating temperature range.
- Typical values are specified at Vcc = 5.0Vdc and 25°C.
- For complete details, see the EM1 (https://www.usdigital.com/products/encoders/incremental/components/modules/em1/) or EM2 (https://www.usdigital.com/products/encoders/incremental/components/modules/em2/) product pages.

PARAMETER	MIN.	TYP.	MAX.	UNITS	CONDITIONS
Supply Voltage	4.5	5.0	5.5	V	
Supply Current		27	33	mA	CPR < 500, no load
		54	62	mA	CPR ≥ 500 and < 2000, no load
		72	85	mA	CPR ≥ 2000, no load
Low-level Output			0.5	V	I _{OL} = 8mA max., CPR < 2000
			0.5	V	I _{OL} = 5mA max., CPR ≥ 2000
		0.25		V	no load, CPR ≥ 2000
High-level Output	2.0			V	I_{OH} = -8mA max. and CPR < 2000
	2.0			V	I _{OH} = -5mA max. and CPR ≥ 2000
		4.8		V	no load and CPR < 2000
		3.5		V	no load and CPR ≥ 2000
Output Current Per Channel	-8		8	mA	CPR < 2000
	-5		5	mA	CPR ≥ 2000
Output Rise Time		110		nS	CPR < 2000
		50		nS	CPR ≥ 2000, ± 5mA load
Output Fall Time		100		nS	CPR < 2000
		50		nS	CPR ≥ 2000, ± 5mA load



PIN-OUT

PIN	DESCRIPTION
1	Ground
2	Index
3	A channel
4	+5VDC power
5	B channel

Note: 5-pin single-ended mating connector is CON-C5 (https://www.usdigital.com/products/accessories/connectors/con-c5/) or CON-LC5 (https://www.usdigital.com/products/accessories/connectors/con-lc5/)



ACCESSORIES

1. Centering Tool

Part #: CTOOL - (Shaft Diameter)

This reusable tool centers the shaft within the encoder base during assembly. It must be used for the proper functioning of the encoder.

2. Hex Tool

Part #: HEXD-050

Hex driver, 0.050" flat-to-flat for #3-48 or #4-48 set screws. Included with -B or -1 packaging options for order quantities of 10 or more.

Part #: HEXW-050

Hex wrench, 0.050" flat-to-flat for #3-48 or #4-48 set screws. Included with **-B** or **-1** packaging options for order quantities of 9 or less. Included with **-3** packaging option for all order quantities.

3. Spacer Tool

Part #: SPACER-L2

This reusable tool sets the correct spacing between the disk and sensor during assembly. It must be used for the proper functioning of the encoder.

4. Screws

Part #: SCREW-256-250-PH

Description: Pan Head, Philips #2-56 UNC x 1/4"

Use: Base Mounting Quantity Required: 2 Screws are not included

Part #: SCREW-440-188-PH

Description: Pan Head, Phillips 4-40 UNC x 3/16"

Use: Base Mounting Quantity Required: 2 Screws are not included

Part #: SCREW-440-250-PH

Description: Pan Head, Philips #4-40 UNC x 1/4"

Use: Base Mounting Quantity Required: 2 Screws are not included

Part #: SCREW-448-063-SS

Description: Socket Head Set Screw, 4-48 UNC x 1/16"

Use: Hub/Disk Mounting for 5/16" - 10mm Bore

Quantity Required: 1 Screw is included

Part #: SCREW-448-125-SS


Description: Socket Head Set Screw, 4-48 UNC x 1/8"

Use: Hub/Disk Mounting for 2mm - 1/4" Bore

Quantity Required: 1 Screw is included



OUTPUT WAVEFORMS

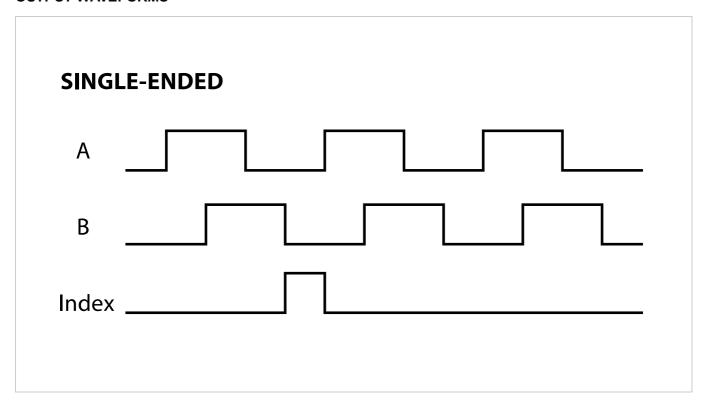

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (https://www.usdigital.com/company/warranty) for details.
- Cables and connectors are not included and must be ordered separately.



Configuration Options

L2 -	CPR (Cycles	Bore Size	Index	Cover	Base	Packaging
	Revolution)	079 (2.0mm)	IE (Index)	D (Default)	D (Default)	Bulk (B) - Includes one centering, hex and spacer tool per order,
	32	118 (3.0mm)	NE (Non- Index)			plus an extra set per 100
	50	125 (1/8")				encoders.
	96	156 (5/32")				Individual (1) - Includes one centering, hex, and spacer tool
	100	157 (4.0mm)				per order, plus an extra set per
	120	188 (3/16")				100 encoders.
	192	197 (5.0mm)				Individual (2) - Includes one
	200	236 (6.0mm)				centering, hex, and spacer tool with each encoder.
	250	250 (1/4")				with caon endoden.
	256	276 (7.0mm)				
	360	313 (<i>5/16"</i>)				
	400	315 (8.0mm)				
	500					
	512					
	540					
	720					
	800					
	900					
	1000					
	1024					
	1250					

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the L2 product page (https://www.usdigital.com/products/L2) for pricing and additional information.

