



CA-RC10-SH-NC Product Description


A 10-pin MIL-C-5015 female connector on one end of a 12-conductor shielded round 24 AWG cable. This low-temperature version has a range of -20C to +80C. The standard length is 1 ft., and available in 1 ft. increments up to 500 ft.



WARNING: This product can cause exposure to substances, such as *phthalate plasticizers*, known to the State of California to cause cancer and reproductive harm. For more information, go to oehha.ca.gov/proposition-65 (<https://oehha.ca.gov/proposition-65>).

Specifications

PIN-OUT

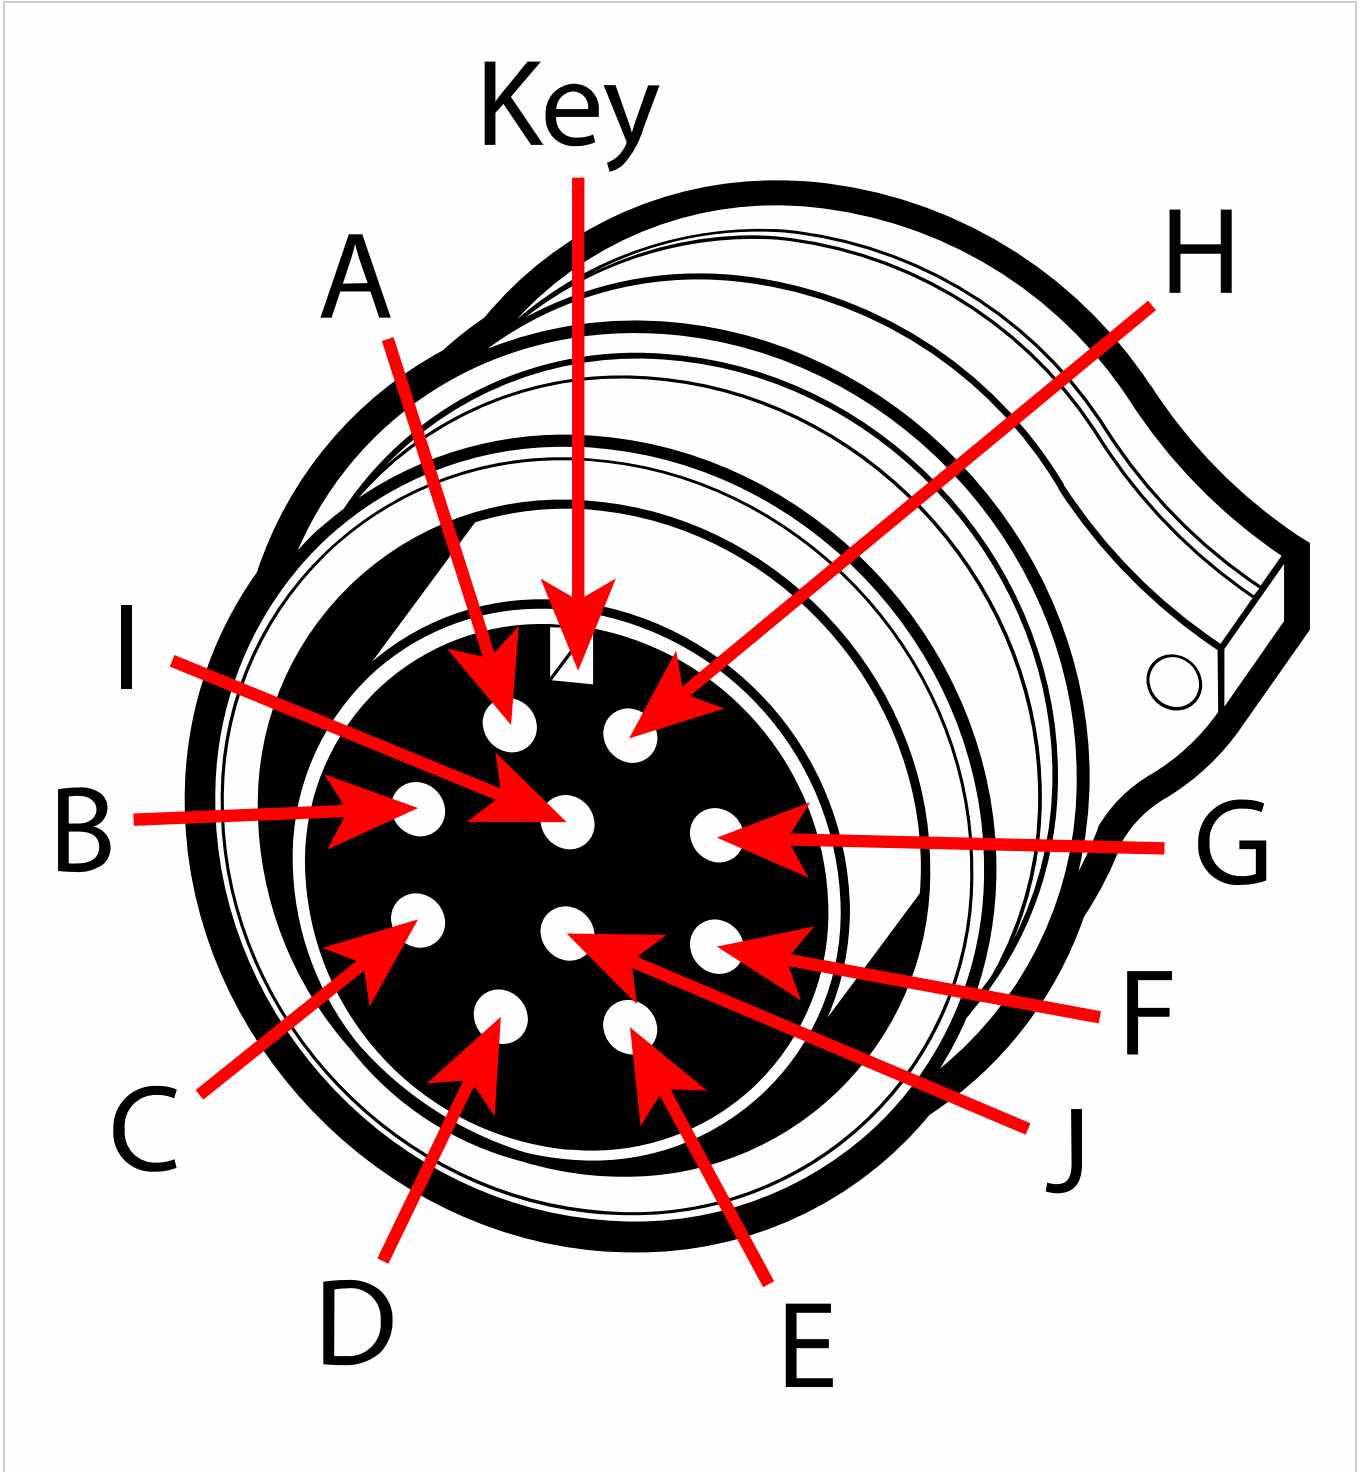



| PIN | HD25 DESCRIPTION | HD25A DESCRIPTION | COLOR |
|-----|------------------|-------------------|-----------------------|
| A | A+ Channel | DataH | Blue / White stripe |
| B | B+ Channel | Busy+ | Brown / White stripe |
| C | I+ Channel(*) | Analog+ | Orange / White stripe |
| D | +VDC | Power | Green / White stripe |
| E | - | - | Gray / White stripe |
| F | Common | Common | White / Gray stripe |
| G | Case Ground | Case Ground | White / Green stripe |
| H | A- Channel | DataL | White / Blue stripe |
| I | B- Channel | Busy- | White / Brown stripe |
| J | I- Channel(*) | Analog- | White / Orange stripe |

* Only available when Index channel is specified.

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.